

# Petal Pendant

## INSTRUCTIONS

### WARNING:

Risk of fire and electrical shock. Installation requires knowledge of electrical systems and should be installed by a qualified electrician. If not qualified, DO NOT ATTEMPT INSTALLATION.

To avoid the risk of fire or overheating, do not exceed the recommended wattage.

SHUT OFF ELECTRICAL SUPPLY AT THE CIRCUIT BREAKER



### Care Instructions:

Wipe with a soft cloth only. Always avoid using harsh chemicals and/or cleaners.

fig. A

**INSTALLATION**  
Place the mounting plate against the junction box while allowing wires to pass through the central opening. Fasten mounting plate/bar to junction box with the mounting screws (2) provided.

fig. B

If the install requires a modification to the cord length, loosen the set screw in the strain relief and gently adjust the cord length. If the cord length requires cutting the cord for cord management reasons, tape the cord and cut above the tape. This will keep the outer jacket from fraying. Tighten set screw once complete.

fig. C

### WIRE CONNECTION

Attach the junction box GROUND WIRE to the bare copper GROUND WIRE from the fixture. Fasten with a plastic wire nut. If there is not a ground wire from the junction box, wrap the bare copper ground wire from the fixture around the green screw on the mounting bracket.

Connect the fixture's WHITE [neutral] wire to the NEUTRAL WIRE from the junction box.

Connect the fixture's BLACK [hot] wire to the HOT WIRE from the junction box.

Tuck the wired connections into the junction box and position the fixture's canopy correctly over the mounting plate.

Secure the canopy to the mounting plate by aligning the canopy tabs with the channels on the mounting plate. A 1/3 turn will lock the fixture into place. You will feel the canopy "click" as it locks. No screws are required.

fig. D


Insert lamping [not included]

Restore power to the junction box.


A




B

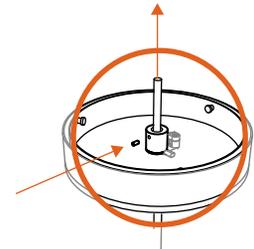

C

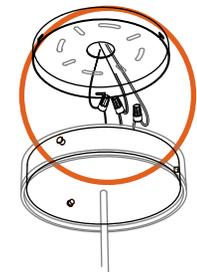

D

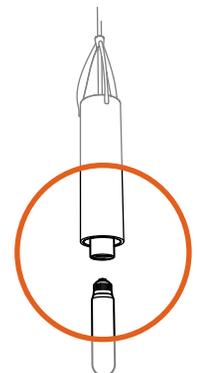

# Petal Pendant

## INSTRUCTIONS

### LAMPING

This light fixture uses a replaceable CFL [compact fluorescent lamp] as a lighting source.

EPA recommends that consumers take advantage of available local recycling options for CFL light bulbs. Ayre recommends contacting your local municipal waste agency for more information, or visit [www.earth911.org](http://www.earth911.org) to identify local recycling efforts.

*"Most makers of light bulbs have reduced mercury in their fluorescent lighting products. Thanks to technology advances and commitment from members of the National Electrical Manufacturers Association, the average mercury content in CFLs has dropped at least 20 percent or more in the past several years. Some manufacturers have even made further reductions, dropping mercury content to 1 mg per light bulb." - energystar.gov*



This fixture requires an 18W, 4-pin, 3000K CFL [FT18W/2G11/830] to fit the fixtures 2G11 socket.

OR



This fixture requires a 60W Max **T10** Incandescent lamp to fit its Incandescent Medium Base socket.