

Axis

INSTRUCTIONS

LAMPING

Risk of fire and electrical shock. Installation requires knowledge of electrical systems and should be installed by a qualified electrician. If not qualified, DO NOT ATTEMPT INSTALLATION.

To avoid the risk of fire or overheating, do not exceed the recommended wattage.

SHUT OFF ELECTRICAL SUPPLY AT THE CIRCUIT BREAKER

CARE INSTRUCTIONS

Wipe with a soft cloth only. Always avoid using harsh chemicals and/or cleaners.

fig. A

INSTALLATION

WIRE CONNECTION

Attach the junction box GROUND WIRE to the bare copper GROUND WIRE from the fixture. Fasten with a plastic wire nut. If there is not a ground wire from the junction box, wrap the bare copper ground wire from the fixture around the green screw on the mounting bracket.

Connect the fixture's WHITE [neutral] wire to the NEUTRAL WIRE from the junction box.

Connect the fixture's BLACK [hot] wire to the HOT WIRE from the junction box.

Tuck the wired connections into the junction box and position the fixture correctly over the junction box holes. Wires must be neatly positioned for the fixture to sit properly on the mounting plate.

Place the fixture against the junction box while allowing wires to pass through the central opening. Fasten fixture to the junction box with the mounting screws (2) provided.

fig. B

Insert the lamp into the socket and twist to lock in place.


fig. C

Pull up on the end cap(s) of the fixture. Place the diffuser in the appropriate slot and fit into place. The diffuser should be inserted at an angle and snapped into place. Run your finger down the diffuser to make sure it is secure in the slot. Slide the top block back down into its original position so that it pins the diffuser in place.


Restore power to the junction box.




A

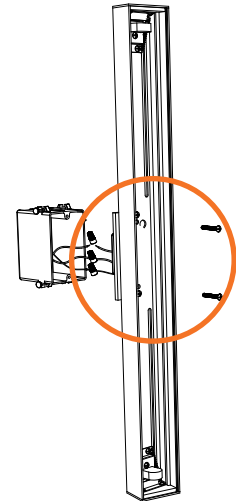

B

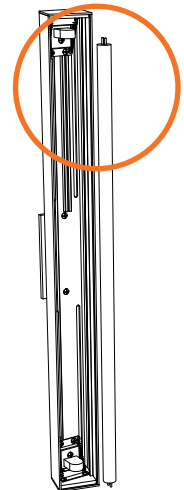

C



Axis

INSTRUCTIONS

LAMPING

This light fixture uses a replaceable T5 fluorescent lamp as a lighting source.

EPA recommends that consumers take advantage of available local recycling options for FL light bulbs. Ayre recommends contacting your local municipal waste agency for more information, or visit www.earth911.org to identify local recycling efforts.

RECOMMENDED LED DIMMER SWITCHES

LED Dimming specifications are not as straight forward as incandescent dimming. You will need an LED dimmer switch to correctly control the LED modules in the fixture. **USE ONLY** Electronic Low Voltage dimmers (ELV) with Reverse Phase, Trailing Edge. This allows the fixtures intensity to dim from high-to-low and low-to-high while reducing flickering. *DO NOT use Triac dimmers - incandescent, C-L, forward phase and Magnetic Low Voltage (MLV) as these will not work with AYRE LED modules.*

If you are not qualified, do not attempt installation. Always consult with a certified electrician.

ELECTRICAL ROUGH-IN

A standard single rectangular junction box is required for installation.

For bathroom applications, Ayre recommends installing a light fixture on each side of the cabinet/mirror.

When marking the rough-in for the junction box(es), the center of each fixture should be at least 5" away from each edge of the cabinet/mirror, making the total distance between the light fixtures a minimum of 20-30" from center to center.

The height for the center of the junction boxes is dependant on the height of the mirror/cabinet while also taking into consideration the height of the end user. We recommend that the center of the diffuser should be at the center of the users face.



This fixture requires an 24W, T5HO, Bipin Base, 1860 Lumens, 3000K, 120V, non-dimming lamp.

or

LED module

FOR DIMMING CAPABILITY SEE BELOW

AYRE recommends using the following dimmers with our linear LED fixtures as they provide the best range of dimming control.

Brand	Series	Model
Lutron	Diva	DVELV-300P*
Leviton	Vizia+	VPE04-1LZ
	Vizia+	VPE06-1LZ

Additional options

Lutron	Maestro	MAELV-600
Leviton	Decora	DSE06-10Z

There are many dimmer options on the market. Choosing an Electronic Low Voltage Dimmer with Reverse Phase and Trailing Edge are required for the best dimming performance.

Always consult with a certified electrician

**Performed best under testing*

HORIZONTAL OR VERTICAL MOUNTING
JBOX MUST BE INSTALLED IN DIRECTION OF FIXTURE

