

# Litebox Open Pendant


## INSTRUCTIONS

### LAMPING

Risk of fire and electrical shock. Installation requires knowledge of electrical systems and should be installed by a qualified electrician. If not qualified, DO NOT ATTEMPT INSTALLATION.

To avoid the risk of fire or overheating, do not exceed the recommended wattage.

SHUT OFF ELECTRICAL SUPPLY AT THE CIRCUIT BREAKER

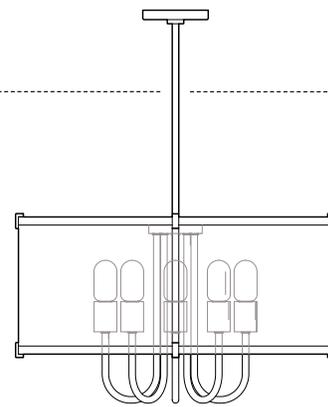

### CARE INSTRUCTIONS

Wipe with a soft cloth only. Always avoid using harsh chemicals and/or cleaners.

### INSTALLATION

fig. A Remove the fixture from the packaging and thread the Stem into the Canopy.

fig. B Feed the wires from the body through the Stem Assembly and thread the Stem Assembly onto the Body.

fig. C Place the Mounting Plate against the junction box while allowing wires to pass through the central opening. Fasten mounting plate/bar to junction box with the (2) mounting screws provided.

### WIRE CONNECTION

fig. D Attach the junction box GROUND WIRE to the bare copper GROUND WIRE from the fixture. Fasten with a plastic wire nut. If there is not a ground wire from the junction box, wrap the bare copper ground wire from the fixture around the green screw on the mounting bracket.





Connect the fixture's WHITE [neutral] wire to the NEUTRAL WIRE from the junction box.

Connect the fixture's BLACK [hot] wire to the HOT WIRE from the junction box.

Tuck the wired connections into the junction box and position the fixture's Canopy correctly over the mounting plate. Fasten the Canopy to the Mounting Plate with the (2) provided screws.

Install lamping [not included]

Restore power to the junction box.

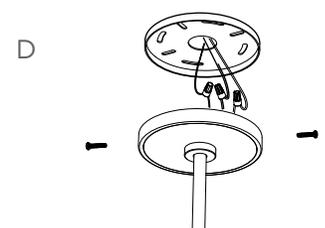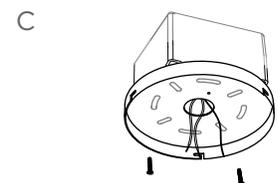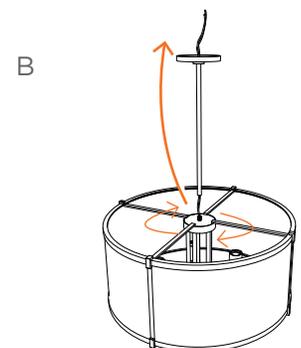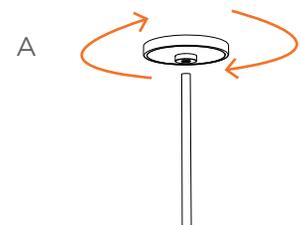

# Litebox Open Pendant

---


## INSTRUCTIONS

### LAMPING

---

This light fixture uses a Vintage Antique light bulb as a lighting source. AYRE using a T14 "Radio" style shape but any style will work in the fixture.

An LED version of this bulb is also available.

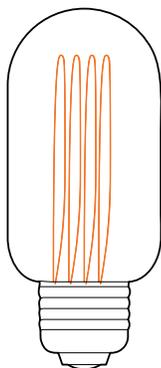

This fixture requires a 40W, Vintage Style bulb to fit the fixtures medium-based incandescent socket.